

Generalized sensing and actuation schemes for local module identification in dynamic networks

Karthik R. Ramaswamy, Paul M.J. Van den Hof and Arne G. Dankers

Abstract—For the problem of identifying a target module that is embedded in a dynamic network with known interconnection structure, different sets of conditions are available for the set of node signals to be measured and the set of excitation signals to be applied at particular node locations. In previous work these conditions have typically been derived from either an indirect identification approach, considering external excitation signals as inputs, or from a direct identification approach, considering measured node signals as inputs. While both approaches lead to different sets of (sufficient) conditions, in this paper we extend the flexibility in the sufficient conditions for selection of excitation and measured node signals, by combining both direct and indirect approaches. As a result we will show the benefits of using both external excitation signals and node signals as predictor inputs. The provided conditions allow us to design sensor selection and actuation schemes with considerable freedom for consistent identification of a target module.

I. INTRODUCTION

In recent years increasing attention has been given to the identification of large-scale dynamically interconnected systems (modules), known as dynamic networks. Among the large amount of literature on this topic, there are three main research trends. The first one deals with the identification of the interconnection structure (topology) of systems in the dynamic network [1], [2], [3], [4]. The second deals with identification of the full network dynamics [5], [6], [7], while the third deals with identification of a target module in the dynamic network under the assumption of known topology (known as local module identification, see [8], [9], [10], [11], [12], [13]).

In this paper we focus on the local module identification problem. In [8], the classical *direct-method* [14] for closed-loop identification has been generalized to a dynamic network framework using a MISO identification setup. It introduces a method to achieve a consistent estimate of the target module when all the node signals in the MISO setup are measured. In [15], an extension has been made towards the situation where some of the node signals might be non-measurable. In [16] and [17], an approach has been introduced to consistently estimate the target module in

the presence of confounding variables due to non-measured nodes and noise correlation. The direct method has been extended to a Bayesian setting in [9], where regularized kernel-based methods are used to reduce the mean-square error of the target module estimates. In [12] and [10], the situation has been addressed where the node measurements are affected by sensor noise.

An important condition in the works that use the direct method [8], [15], [16], [17] is that all parallel paths from the input of the target module to its output and all loops through the output node should pass through a measured node signal that is included as a predictor input. This requirement ensures that the identified module using the direct method is equal to the target module. However, in practical situations, there can be parallel paths and loops that might have all nodes non-measured. This creates a restriction for the selection of measured node signals.

In *indirect method* as in [11], [7], external excitation signals are used as predictor inputs for an open loop MIMO identification problem. These methods involve two steps: (1) First obtain consistent estimates of a transfer function from external signals to measured node signal; (2) Using these estimates obtain consistent estimates of the target module (we call this step as *post-processing*). In [7], the freedom in selection of measured node signal is exploited under the condition that all nodes are excited.

In this paper we extend the flexibility in the sufficient conditions for selection of excitation and measured node signals for consistent target module estimates and thereby generalizing the sensing and actuation schemes. We relax the above discussed condition on the parallel paths and loops around the output node. This relaxation in conditions are achieved by combining elements of both direct and indirect approaches. We use both the node signals and external excitation signals as predictor inputs, allow post-processing of module estimates, use MIMO identification setting and thereby mixing both direct and indirect methods. The provided conditions allow us to design sensor selection and actuation schemes with considerable freedom for consistent identification of a target module.

II. NETWORK AND IDENTIFICATION SETUP

A. Dynamic network setup

Following the basic setup of [8], a dynamic network is built up out of L scalar *internal variables* or *nodes* w_j , $j = 1, \dots, L$, and K *external variables* r_k , $k = 1, \dots, K$. Each internal variable is described as:

This project has received funding from the European Research Council (ERC), Advanced Research Grant SYSDYNET, under the European Unions Horizon 2020 research and innovation programme (Grant Agreement No. 694504).

Karthik Ramaswamy and Paul Van den Hof are with the Department of Electrical Engineering, Eindhoven University of Technology, Eindhoven, The Netherlands {k.r.ramaswamy, p.m.j.vandenhof}@tue.nl

Arne Dankers is with the Electrical and Computer Engineering Dept. at the University of Calgary, Canada, adankers@hifieng.com

$$w_j(t) = \sum_{\substack{l=1 \\ l \neq j}}^L G_{jl}(q)w_l(t) + u_j(t) + v_j(t) \quad (1)$$

where q^{-1} is the delay operator, i.e. $q^{-1}w_j(t) = w_j(t-1)$;

- G_{jl} is a proper rational transfer referred to as *modules*;
- $u_j(t)$ is generated by the *external variables* $r_k(t)$ that can directly be manipulated by the user and is given by $u_j(t) = \sum_{k=1}^K R_{jk}(q)r_k(t)$ where R_{jk} are stable, proper rational transfer functions;
- v_j is *process noise*, where the vector process $v = [v_1 \cdots v_L]^T$ is modelled as a stationary stochastic process with rational spectral density $\Phi_v(\omega)$, such that there exists a white noise process $e := [e_1 \cdots e_L]^T$, with covariance matrix $\Lambda > 0$ such that $v(t) = H(q)e(t)$, where H is square, stable, monic and minimum-phase.

We will assume that the standard regularity conditions on the data are satisfied that are required for convergence results of prediction error identification method¹. In this paper we consider the situation where $u_j(t) = \sum_{k=1}^K R_{jk}(q)r_k(t)$, and $R_{jk} = 1$ if $j = k$, $R_{jk} = 0$ if $j \neq k$, and $j = 1, \dots, L$.

When combining the L node signals we arrive at the full network expression

$$\begin{bmatrix} w_1 \\ w_2 \\ \vdots \\ w_L \end{bmatrix} = \begin{bmatrix} 0 & G_{12} & \cdots & G_{1L} \\ G_{21} & 0 & \ddots & \vdots \\ \vdots & \ddots & \ddots & G_{L-1,L} \\ G_{L1} & \cdots & G_{L,L-1} & 0 \end{bmatrix} \begin{bmatrix} w_1 \\ w_2 \\ \vdots \\ w_L \end{bmatrix} + \begin{bmatrix} u_1 \\ u_2 \\ \vdots \\ u_L \end{bmatrix} + H \begin{bmatrix} e_1 \\ e_2 \\ \vdots \\ e_L \end{bmatrix}$$

which results in the matrix equation:

$$w = Gw + Rr + He. \quad (2)$$

We will assume that the dynamic network is stable, i.e. $(I - G)^{-1}$ is stable, and well posed (see [18] for details).

The identification problem to be considered is the problem of identifying one particular module $G_{ji}(q)$ on the basis of a selection of measured variables w , and possibly r .

B. Direct method

Let us define \mathcal{N}_j^- as the set of node indices k such that $G_{jk} \neq 0$, i.e. the node signals in \mathcal{N}_j^- are the w -in-neighbors of the node signal w_j . The nodes corresponding to the set of node indices k such that $G_{kj} \neq 0$ are called the w -out-neighbors of w_j (i.e. \mathcal{N}_j^+). Let \mathcal{D}_j denote the set of indices of the internal variables that are chosen as predictor inputs. Let \mathcal{Z}_j denote the set of indices not in $\{j\} \cup \mathcal{D}_j$, i.e. $\mathcal{Z}_j = \{1, \dots, L\} \setminus \{\{j\} \cup \mathcal{D}_j\}$. Let $w_{\mathcal{D}}$ denote the vector $[w_{k_1} \cdots w_{k_n}]^T$, where $\{k_1, \dots, k_n\} = \mathcal{D}_j$. Let $u_{\mathcal{D}}$ denote the vector $[u_{k_1} \cdots u_{k_n}]^T$, where $\{k_1, \dots, k_n\} = \mathcal{D}_j$, and where the l th entry is zero if u_l is not present in the network. The vectors $w_{\mathcal{Z}}$, $v_{\mathcal{D}}$, $v_{\mathcal{Z}}$ and $u_{\mathcal{Z}}$ are defined analogously. The ordering of the elements in $w_{\mathcal{D}}$, $v_{\mathcal{D}}$, and $u_{\mathcal{D}}$ is not important, as long as it is the same for all vectors. The transfer function matrix between $w_{\mathcal{D}}$ and w_j is denoted $G_{j\mathcal{D}}$. The other transfer function matrices are defined analogously.

¹See [14] page 249. This includes the property that $e(t)$ has bounded moments of order higher than 4.

By this notation, the network equation (2) is rewritten as:

$$\begin{bmatrix} w_j \\ w_{\mathcal{D}} \\ w_{\mathcal{Z}} \end{bmatrix} = \begin{bmatrix} 0 & G_{j\mathcal{D}} & G_{j\mathcal{Z}} \\ G_{\mathcal{D}j} & G_{\mathcal{D}\mathcal{D}} & G_{\mathcal{D}\mathcal{Z}} \\ G_{\mathcal{Z}j} & G_{\mathcal{Z}\mathcal{D}} & G_{\mathcal{Z}\mathcal{Z}} \end{bmatrix} \begin{bmatrix} w_j \\ w_{\mathcal{D}} \\ w_{\mathcal{Z}} \end{bmatrix} + \begin{bmatrix} v_j \\ v_{\mathcal{D}} \\ v_{\mathcal{Z}} \end{bmatrix} + \begin{bmatrix} u_j \\ u_{\mathcal{D}} \\ u_{\mathcal{Z}} \end{bmatrix}, \quad (3)$$

where $G_{\mathcal{D}\mathcal{D}}$ and $G_{\mathcal{Z}\mathcal{Z}}$ have zeros on the diagonal.

Identification of module G_{ji} can be done by selecting \mathcal{D}_j such that $i \in \mathcal{D}_j$, and subsequently estimating a multiple-input single output model for the transfer functions in $G_{j\mathcal{D}}$. This can be done by considering the one-step-ahead predictor² $\hat{w}_j(t|t-1) := \mathbb{E}\{w_j(t) | w_j^{t-1}, w_{\mathcal{D}_j}^t\}$, and the resulting prediction error ([14]) $\varepsilon_j(t, \theta) = w_j(t) - \hat{w}_j(t|t-1, \theta)$, given by

$$\varepsilon_j(t, \theta) = H_j(\theta)^{-1} \left(w_j - \sum_{k \in \mathcal{D}_j} G_{jk}(\theta)w_k - u_j \right) \quad (4)$$

where arguments q and t have been dropped for notational clarity. The parameterized transfer functions $G_{jk}(\theta)$, $k \in \mathcal{D}_j$ and $H_j(\theta)$ are estimated by minimizing the sum of squared (prediction) errors: $V_j(\theta) = \frac{1}{N} \sum_{t=0}^{N-1} \varepsilon_j^2(t, \theta)$, where N is the length of the data set. We refer to this identification method as the *direct method*, [8]. Let $\hat{\theta}_N$ denote the minimizing argument of $V_j(\theta)$.

C. Indirect method

As an alternative approach, following the setup of [7], the network model (2) can be re-written as $w = T_{wr}r + \bar{v}$ where $T_{wr} = (I - G)^{-1}R$ and $\bar{v} = (I - G)^{-1}He$. Using the known external references r as predictor inputs and measured signals w as predicted outputs, it is well known that, under appropriate conditions, a consistent estimate \hat{T}_{wr} of T_{wr} can be obtained using open loop MIMO identification methods. On the basis of \hat{T}_{wr} , an estimate of \hat{G} can be obtained by solving $(I - \hat{G})\hat{T}_{wr} = R$. By solving only a subset of these equations, a target module embedded in the dynamic network can be identified. We refer to this type of identification method that uses external signals as predictor inputs as the *indirect method*.

III. BACKGROUND AND MOTIVATING EXAMPLE

In this section we highlight the motivation of the paper using a suitable example. In [15] it has been shown that we can identify the target module G_{ji} consistently provided that we choose the selection of predictor input signals to satisfy particular properties. One of the main conditions is formulated next.

Property 1: To identify a target module G_{ji} , consider a set of internal variables w_k , $k \in \mathcal{D}_j$. Let \mathcal{D}_j satisfy the following properties:

- 1) $i \in \mathcal{D}_j$ and $j \notin \mathcal{D}_j$;
- 2) Every path from w_i to w_j , excluding the path through G_{ji} , pass through a node w_k , $k \in \mathcal{D}_j$ (*parallel path condition*);
- 3) Every loop through w_j pass through a node w_k , $k \in \mathcal{D}_j$ (*loop condition*).

² \mathbb{E} refers to $\lim_{N \rightarrow \infty} \frac{1}{N} \sum_{t=1}^N \mathbb{E}$, and w_j^t and $w_{\mathcal{D}_j}^t$ refer to signal samples $w_j(\tau)$ and $w_k(\tau)$, $k \in \mathcal{D}_j$, respectively, for all $\tau \leq t$.

When this property is satisfied, the *direct method* as discussed in section II-B provides a consistent estimate of the target module, if data informativity conditions are satisfied, and in addition there are no confounding variables for the estimation problem $w_{\mathcal{D}_j} \rightarrow w_j$ ³. This restrictive property is required for the target module in the dynamic network to be invariant in an immersed network where all non-measured signals are being removed while keeping the remaining signals invariant [15].

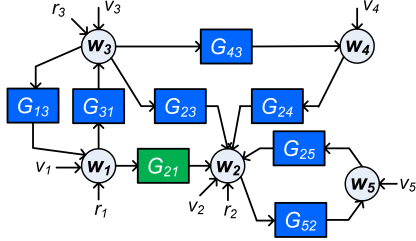


Fig. 1. Example network

Example 1: Consider a dynamic network as represented in Figure 1 with all noises in v uncorrelated with each other. For identifying the target module G_{21} (in green box), we have $j = 2$, and in order to satisfy Property 1 we need $\mathcal{D}_j = \{1, 3, 5\}$ where w_3 is included to block the parallel path from w_1 to w_2 , and w_5 is included to block the loop through w_2 . Using this set of measured nodes, we arrive at an immersed network after removing the non-measured node w_4 as sketched in Figure 2. We can observe that the module between w_1 and w_2 (the green box) is G_{21} and remains invariant.

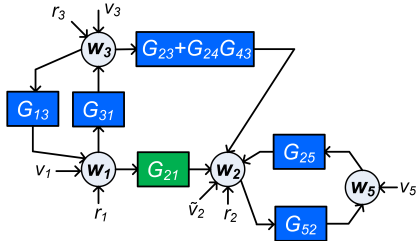


Fig. 2. Immersed network of network in figure 1 [15] where the non-measured node w_4 has been removed (immersed), and where $\tilde{v}_2 = v_2 + G_{24}v_4$.

If w_3 and w_5 are not selected in \mathcal{D}_j , and so $\mathcal{D}_j = \{1\}$, we arrive at an immersed network after removing all non-measured nodes, as depicted in Figure 3. We can now observe that the dynamic module between w_1 and w_2 (the green box in figure 3) is not equal to G_{21} . The terms $(1 - G_{25}G_{52})^{-1}$ and $G_{23}G_{31}$ are due to the fact that in this situation the loop and parallel path condition in property 1 are not satisfied, respectively. In this paper we are going to relax these restrictive conditions in property 1 and increase the freedom in the selection of measured node signals.

For the approach based on the indirect identification method, in [11] a method has been presented to identify

³A confounding variable is an unmeasured variable that induces correlation between the input and output signal of an estimation problem [19]. See [17] for a formal definition.

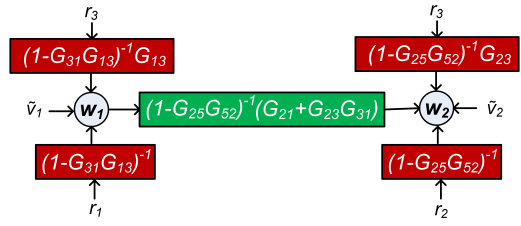


Fig. 3. Immersed network of network in figure 1[15] where the non-measured nodes w_3, w_4, w_5 have been removed (immersed), and where $\tilde{v}_1 = (1 - G_{31}G_{13})^{-1}(v_1 + G_{13}v_3)$ and $\tilde{v}_2 = (1 - G_{25}G_{52})^{-1}(v_2 + (G_{23} + G_{24}G_{43})v_3 + G_{24}v_4 + G_{25}v_5)$.

a target module using external signals as predictor inputs, along the following reasoning.

Proposition 1 (from [11]): In order to identify a target module G_{ji} , perform the following experiment:

- 1) Excite node w_i and all its w -out-neighbors with sufficiently rich signals. Include these excitation signals as predictor inputs;
- 2) measure the out-neighbors of w_i . Include them as predicted outputs.

Under these conditions and using full order models for the elements of T_{wr} , consistent estimates $\hat{T}_{\mathcal{N}_i^+ \mathcal{N}_i^+}$, $\hat{T}_{\mathcal{N}_i^+ i}$ of $T_{\mathcal{N}_i^+ \mathcal{N}_i^+}$ and $T_{\mathcal{N}_i^+ i}$ can be obtained using an open loop MIMO identification method. Then a consistent estimate of $\hat{G}_{\mathcal{N}_i^+ i}$ (which includes the target module) is obtained by,

$$\hat{G}_{\mathcal{N}_i^+ i} = [\hat{T}_{\mathcal{N}_i^+ \mathcal{N}_i^+}]^{-1} \hat{T}_{\mathcal{N}_i^+ i} \quad (5)$$

A dual of this proposition with w -in-neighbors of w_j is also provided in [11]. It can be observed that a consistent estimate of the target module is obtained from consistent estimates of elements of T_{wr} . We will refer to this step (5) of manipulating identified objects, as *post-processing*. Considering the earlier Example 1, we can now consistently identify our target module using an open loop MIMO identification setup with $\{r_1, r_2, r_3\}$ as inputs and $\{w_2, w_3\}$ as outputs. However this requires restrictive conditions on the nodes to be excited and nodes to be measured, i.e. measured excitation signals r_1, r_2, r_3 . Further relaxations of these restrictive conditions on excitation and measured node signals will be addressed in the sequel.

IV. ILLUSTRATION OF THE DEVELOPED METHOD

In this section we illustrate the developed method in this paper with suitable examples. In this paper, we combine the ideas of both the direct and indirect method such that we introduce flexibility in the selection of excitation and measured node signals. We use both the measured node signals as well as the excitation signals as predictor inputs. In addition to that, we do not restrict to the situation of invariance of our target module after immersion as in the direct method, but use the mechanism of *post-processing* from the indirect method to consistently identify the target module.

Example 2: We now consider the same network as in Example 1 but with two constraints: (a) it is not possible

to measure w_3 and w_5 ; (b) it is not possible to excite node w_1 (i.e. no r_1). It can be inferred that it is not possible to consistently estimate $G_{ji} = G_{21}$ using the direct method due to constraint (a). Similarly due to constraint (b), it is not possible with the indirect method either.

As shown in Example 1, if we do not measure w_3 and w_5 our target module changes to $(1 - G_{25}G_{52})^{-1}(G_{21} + G_{23}G_{31})$ in the immersed network. However, we can see that this module also contains the target module of interest G_{21} . Therefore we might extract the target module from this term if we know (or) find the other contributions.

Consider that we excite node w_3 , w_5 and measure node w_4 . After immersing the non-measured nodes (see [15]) we end up in a dynamic network setup as in Figure 4. Now consider the identification problem $\{w_1, w_4, r_2, r_3\} \rightarrow \{w_2, w_4\}$. We can infer the following from the figure:

- 1) Identifying the transfer from $r_3 \rightarrow w_4$ provides G_{43} and the transfer from $w_1 \rightarrow w_4$ provides $G_{43}G_{31}$. Thus we can identify G_{31} ;
- 2) The transfer from $r_3 \rightarrow w_2$ provides $(1 - G_{25}G_{52})^{-1}G_{23}$. The term $(1 - G_{25}G_{52})^{-1}$ is due to the fact that in the original network there is a loop around w_2 which is not “blocked” by a measured node. This term is given by the transfer from $r_2 \rightarrow w_2$. Now, we can obtain G_{23} .
- 3) The term $G_{23}G_{31}$ is due to the fact that in the original network there is a path from w_1 to w_2 through w_3 which is not “blocked” by a measured node. Knowing G_{23} and G_{31} from the above two steps, we obtain the term $G_{23}G_{31}$. We also know $(1 - G_{25}G_{52})^{-1}$. Eventually we obtain our target module of interest from the transfer $w_1 \rightarrow w_2$ (i.e. $(1 - G_{25}G_{52})^{-1}(G_{21} + G_{23}G_{31})$).

This shows that we can consistently identify the target module G_{21} if we know or could consistently identify the transfer from $\{w_1, w_4, r_2, r_3\} \rightarrow \{w_2, w_4\}$.

Remark 1: The consistency results may still require additional excitation conditions, which will be specified later on.

We can observe from Figure 4 that the noise at predictor input w_1 and at predicted outputs w_2, w_4 are correlated due to v_3 . This is due to the fact that in the original network, v_3 (in turn e_3) has simultaneous paths to w_1 and w_2 (also w_1 and w_4), while these paths run through the unmeasured node w_3 . Therefore e_3 , which is a *confounding variable*, creates noise correlation between predictor inputs and predicted outputs. When using the prediction error framework with the MIMO setup as explained above (i.e. with $\{w_2, w_4\}$ as predicted outputs), we only model the noise from $\{e_2, e_4\} \rightarrow \{w_2, w_4\}$ but not from the confounding variable e_3 . This leads to a lack of consistency property of identified modules [16]. If we also predict w_1 (include it also as predicted output), we now model the noise from e_3 as well. This leads to consistent estimates. This has been studied in [20] for a two-node example network. Therefore for the Example 2, we need the MIMO identification setup $\{w_1, w_4, r_2, r_3\} \rightarrow \{w_1, w_2, w_4\}$.

From the discussed example, we can now conjecture the following generalization:

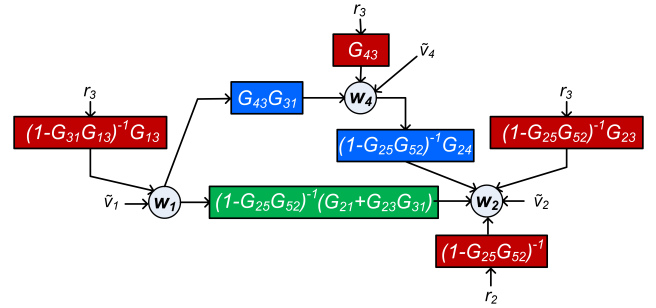


Fig. 4. Immersed network of network in Figure 1 where the nonmeasured nodes w_3, w_5 have been removed (immersed), and where $\tilde{v}_1 = (1 - G_{31}G_{13})^{-1}(v_1 + G_{13}v_3)$, $\tilde{v}_2 = (1 - G_{25}G_{52})^{-1}(v_2 + G_{23}v_3 + G_{25}v_5)$ and $\tilde{v}_4 = v_4 + G_{43}v_3$.

- 1) Violating the parallel path condition can be handled by exciting a node in the parallel path, including the excitation signal in the predictor input, and by measuring a descendant node from the excited node, different from the output of the target module, and by including this descendant node in the predicted output;
- 2) Violating the loop condition can be handled by either
 - exciting the output node and including the excitation signal in the predictor input; or
 - exciting a node in the loop, including the excitation signal in the predictor input, and by measuring a descendant node from the excited node, different from the output of the target module, and by including this descendant node in the predicted output;
- 3) Confounding variables can be handled by including measured nodes as predicted outputs⁴.

In the sequel of this paper, we will derive the formal results that underly the above conjectured statements.

V. CONCEPTS AND NOTATION

We will denote w_y as the node signals in w that serve as predicted outputs, and w_p as the node signals in w that serve as predictor inputs, and r_p as the external excitation signals in r that serve as predictor inputs. Next we decompose w_y and w_p in disjoint sets according to: $\mathcal{Y} = \mathcal{Q} \cup \mathcal{O} \cup \{o\}$; $\mathcal{D} = \mathcal{Q} \cup \mathcal{A}$ where $w_{\mathcal{Q}}$ are the node signals that are common in w_y and w_p ; $w_{\mathcal{O}}$ is the set of node signals that are only predicted outputs (excluding the output node of target module); w_o is the output w_j of the target module; if $j \in \mathcal{Q}$ then $\{o\}$ is void. Additionally we denote w_z as the node signals in w that are neither predicted output nor predictor input, i.e. $\mathcal{Z} = \mathcal{L} \setminus \{\mathcal{D} \cup \mathcal{Y}\}$, where $\mathcal{L} = \{1, 2, \dots, L\}$. Next we define the set related to r_p as $\mathcal{P} \subseteq \mathcal{L} \setminus \mathcal{A}$.

VI. MIMO IDENTIFICATION SETUP

Consider a dynamic network defined by (2), however with $cov(e) = I$ and H not necessarily monic. The identification that we need to perform refers to the estimation problem

⁴Confounding variables can also be handled in other ways, for example, adding predictor inputs (see [16], [17]). In this paper we handle using predicted outputs in order to avoid measurement of additional node signals.

f) For every subset of \mathcal{Z}_r (i.e. $\mathcal{S}_r \subseteq \mathcal{Z}_r$) with cardinality C , there are unmeasured paths to at least C nodes in w_τ with each node in $w_{\mathcal{S}_r}$ having at least one path.

Theorem 2: Consider the situation of Theorem 1. Let $i \in \mathcal{D}$ and let the sets \mathcal{Z}_r and \mathcal{T} satisfy Property 2. Then a consistent estimate of target module G_{ji} is obtained as

$$G_{ji}(\hat{\theta}_N) = \check{R}_{jj}^{-1}(\hat{\theta}_N) \left(\check{G}_{ji}(\hat{\theta}_N) - \bar{R}_{jz_r}(\theta) R_{\tau z_r}^\dagger(\hat{\theta}_N) \check{G}_{\tau i}(\hat{\theta}_N) \right)$$

where⁶

- 1) $\check{R}_{jj} = \bar{R}_{jj}$ if w_j is excited by an external signal u_j ;
- 2) $\check{R}_{jj} = \left(1 - (1 + \bar{R}_{jz_r} \bar{R}_{\tau z_r}^\dagger \bar{G}_{\tau j})^{-1} \bar{R}_{jz_r} \bar{R}_{\tau z_r}^\dagger \bar{G}_{\tau j} \right)^{-1}$ if w_j is not excited by an external signal u_j ;
- 3) $\check{G}_{\tau i} = \bar{G}_{\tau i}$ if $i \notin \mathcal{T}$;
- 4) $\check{G}_{\tau i} = (\bar{G}_{\tau i} + \check{R}_{ii})$ if $i \in \mathcal{T}$, where \check{R}_{ii} is a column vector with every element as zero except the element corresponding to node w_i which is $\bar{R}_{ii}(1 - \bar{R}_{ii}^{-1})$ \square

Proof: The detailed proof for the above theorem is provided in [21]. \square

Here $[\cdot]^\dagger$ correspond to the left inverse of the matrix. The left inverse exists if set \mathcal{Z}_r and \mathcal{T} has Property 2.

We interpret Property 2 using the network in Figure 5. We have one unmeasured parallel path from w_i to w_j and one unmeasured loop through w_j . Considering the parallel path, the excited node w_2 and its measured descendant w_1 ensures that Property 2a) and 2b) are satisfied with w_2 in w_{z_r} and w_1 in w_τ . Similarly, considering the unmeasured loop through w_j , the excited node w_5 and its measured descendant w_1 ensures that Property 2d) is satisfied with w_5 in w_{z_r} . Property 2e) is satisfied with both w_2 and w_5 being excited by external signals. However, Property 2f) is not satisfied if $w_{z_r} = \{w_2, w_5\}$ and $w_\tau = w_1$. For the subset $\mathcal{S}_r = \mathcal{Z}_r$ with cardinality equal to 2, there are unmeasured paths to only 1 node in w_τ (i.e. w_1). Hence we choose w_9 in w_τ , which is a descendant of w_5 and ensure that Property 2f) is satisfied. Property 2c) is redundant for this case since $i \notin \mathcal{T}$. It is important to note that w_τ can be any node in the network that satisfies the Property 2 and thus relaxes the sensor placement scheme.

VIII. CONCLUSIONS

A new local module identification method has been introduced that consistently identifies the target module under known topology, with a generalized scheme for selection of measured node signals and excitation of nodes. We provide flexibility in the sufficient conditions to identify a target module which creates considerable freedom in sensor selection and actuation schemes. This is achieved by combining elements of the direct and indirect identification approaches. We use both node signals and external excitation signals as predictor inputs, allow post-processing of module estimates, and use a MIMO identification setting. With this step we remove restrictive conditions on measured node signals and excitation signals that are present in the currently available methods, e.g. concerning parallel paths and loops around the output.

⁶notation $(\hat{\theta}_N)$ is dropped in the following expressions.

REFERENCES

- [1] D. Materassi and M. Salapaka, "On the problem of reconstructing an unknown topology via locality properties of the Wiener filter," *IEEE Trans. Automatic Control*, vol. 57, no. 7, pp. 1765–1777, 2012.
- [2] B. Sanandaji, T. Vincent, and M. Wakin, "Exact topology identification of large-scale interconnected dynamical systems from compressive observations," in *Proc. American Control Conference (ACC)*, San Francisco, CA, USA, 2011, pp. 649–656.
- [3] D. Materassi and G. Innocenti, "Topological identification in networks of dynamical systems," *IEEE Trans. Automatic Control*, vol. 55, no. 8, pp. 1860–1871, 2010.
- [4] A. Chiuso and G. Pillonetto, "A Bayesian approach to sparse dynamic network identification," *Automatica*, vol. 48, pp. 1553–1565, 2012.
- [5] A. Haber and M. Verhaegen, "Subspace identification of large-scale interconnected systems," *IEEE Transactions on Automatic Control*, vol. 59, no. 10, pp. 2754–2759, 2014.
- [6] H. H. M. Weerts, P. M. J. Van den Hof, and A. G. Dankers, "Prediction error identification of linear dynamic networks with rank-reduced noise," *Automatica*, vol. 98, pp. 256–268, December 2018.
- [7] A. S. Bazanella, M. Gevers, J. M. Hendrickx, and A. Parraga, "Identifiability of dynamical networks: which nodes need to be measured?" in *Proc. 56th IEEE Conf. on Decision and Control*, 2017, pp. 5870–5875.
- [8] P. M. J. Van den Hof, A. G. Dankers, P. S. C. Heuberger, and X. Bombois, "Identification of dynamic models in complex networks with prediction error methods - basic methods for consistent module estimates," *Automatica*, vol. 49, no. 10, pp. 2994–3006, 2013.
- [9] K. R. Ramaswamy, G. Bottegal, and P. M. J. Van den Hof, "Local module identification in dynamic networks using regularized kernel-based methods," in *Proc. 57th IEEE Conf. on Decision and Control (CDC)*, Miami Beach, FL, USA: IEEE, 2018, pp. 4713–4718.
- [10] N. Everitt, G. Bottegal, and H. Hjalmarsson, "An empirical bayes approach to identification of modules in dynamic networks," *Automatica*, vol. 91, pp. 144–151, 5 2018.
- [11] M. Gevers, A. Bazanella, and G. Vian da Silva, "A practical method for the consistent identification of a module in a dynamical network," *IFAC-PapersOnLine*, vol. 51-15, pp. 862–867, 2018, proc. 18th IFAC Symp. System Identif. (SYSID2018).
- [12] A. G. Dankers, P. M. J. Van den Hof, X. Bombois, and P. S. C. Heuberger, "Errors-in-variables identification in dynamic networks – consistency results for an instrumental variable approach," *Automatica*, vol. 62, pp. 39–50, 2015.
- [13] D. Materassi and M. Salapaka, "Identification of network components in presence of unobserved nodes," in *Proc. 2015 IEEE 54th Conf. Decision and Control, Osaka, Japan*, 2015, pp. 1563–1568.
- [14] L. Ljung, *System Identification: Theory for the User*. Englewood Cliffs, NJ: Prentice-Hall, 1999.
- [15] A. G. Dankers, P. M. J. Van den Hof, P. S. C. Heuberger, and X. Bombois, "Identification of dynamic models in complex networks with prediction error methods: Predictor input selection," *IEEE Trans. on Automatic Control*, vol. 61, no. 4, pp. 937–952, 2016.
- [16] A. G. Dankers, P. M. J. Van den Hof, D. Materassi, and H. H. M. Weerts, "Conditions for handling confounding variables in dynamic networks," *IFAC-PapersOnLine*, vol. 50, no. 1, pp. 3983–3988, 2017, proc. 20th IFAC World Congress.
- [17] P. M. J. Van den Hof, K. R. Ramaswamy, A. G. Dankers, and G. Bottegal, "Local module identification in dynamic networks with correlated noise: the full input case," in *58th IEEE Conf. on Decision and Control (CDC)*, 2019, to appear.
- [18] A. G. Dankers, "System identification in dynamic networks," PhD dissertation, Delft University of Technology, 2014.
- [19] J. Pearl, *Causality: Models, Reasoning, and Inference*. New York: Cambridge University Press, 2000.
- [20] P. M. J. Van den Hof, A. G. Dankers, and H. H. M. Weerts, "From closed-loop identification to dynamic networks: generalization of the direct method," in *Proc. 56nd IEEE Conf. on Decision and Control (CDC)*, Melbourne, Australia: IEEE, 2017, pp. 5845–5850.
- [21] K. R. Ramaswamy, P. M. J. Van den Hof, and A. G. Dankers, "Generalized sensing and actuation schemes for local module identification in dynamic networks," Tech. Rep., 2019. [Online]. Available: <http://www.publications.pvandenhof.nl/Reportfiles/Ramaswamy&etal-CDC2019-extended.pdf>